


Ship navigation lamp, E shape

SN-T 10W/2412U/24/BAY15D

Radium

Product Datasheet Date: 19.07.2023

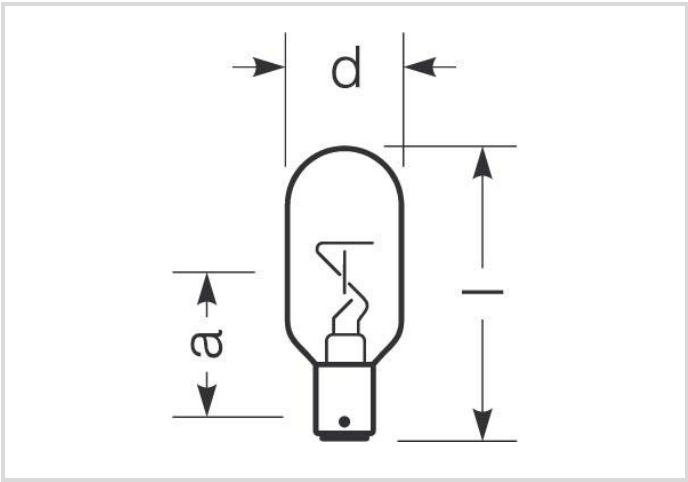

General Data

Article No.	26109213
Code	SN-T 10W/2412U/24/BAY15D
Product EAN	4008597092138
Customs tariff no.	85392998
Box quantitiy (pcs.)	100
EAN Box	4008597492136
Gross weight of box in kg	1.754
Length of box in m	0.3
Width of box in m	0.16
Height of box in m	0.17
ETIM class	EC000820
ETIM class name	Traffic signalling lamp
Weight	13 g
Product status	 Phase Out

Electric Parameters

Rated wattage	10.0 W
Lamp nominal wattage	10 W
Power factor	1.00
Nominal voltage	24 V
Lamp voltage	24-24 V
Mains voltage	24 V
Lamp's nominal current	0.833 A

Ship navigation lamp, E shape

SN-T 10W/2412U/24/BAY15D

Radium

Electric Parameters

Nominal current (mA)	833 mA
----------------------	--------

Light Application Parameters

Luminous intensity	12 cd
Color rendering index Ra	100

Specification

Diameter	26 mm
Length max.	70 mm
Burning position	any
Mercury content	0.0 mg
Model	Clear
Base	BAY15d

Notes on Operation

Burning position	any
------------------	-----

Miscellaneous

EU Directive	special lamp
--------------	--------------

Notes

Officially registered with the Federal Office for Navigation in Hamburg, Germany. Nominal life 1000h. Special lamp not suitable for general lighting.

Please, refer to www.radium.de/recycling for notes on disposal of burned-out lamps as well as lamp breakage.

The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.

The optimal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

Base



BAY15d
IEC/EN 60061-1
sheet 7004-11B-7

Spectrum

As daylight is a mixture of direct sunlight and light from the sky, the spectral distribution changes all the time due to the time of the day and the weather. The standard illuminant D65 corresponds to daylight with colour temperature of about 6500K.


Incandescent lamps have got a continuous red-dominated spectrum as the light is generated by heating up a tungsten filament.

Ship navigation lamp, E shape


SN-T 10W/2412U/24/BAY15D

Radium

Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/klm)per 10nm.

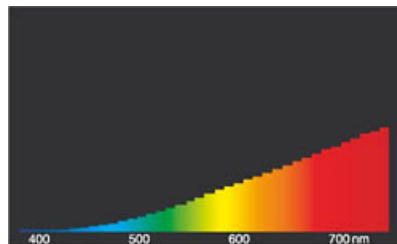


light of incandescent lamps

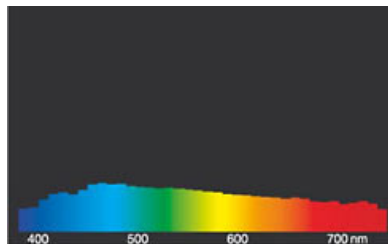

daylight(D 65)

Special features



General notes

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

All technical data without guarantee.