


Ship navigation lamp, B shape

SN-T 60W/1150C/110/P28S

Radium

Product Datasheet Date: 19.07.2023

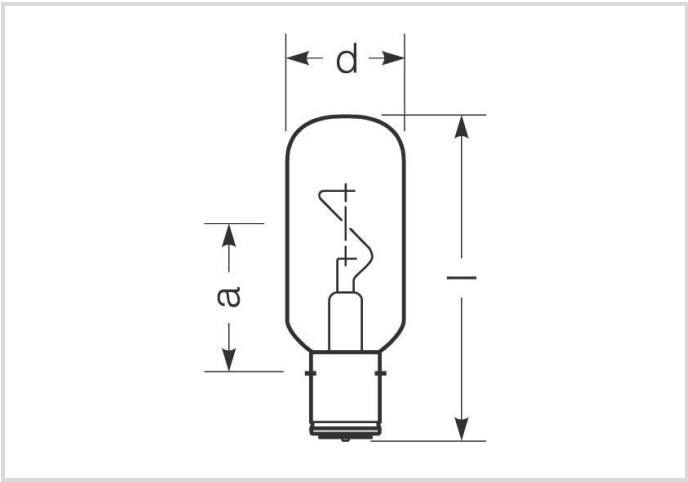

General Data

Article No.	26122916
Code	SN-T 60W/1150C/110/P28S
Product EAN	4008597229169
Customs tariff no.	85392290
Box quantitiy (pcs.)	100
EAN Box	4008597411694
Gross weight of box in kg	5.78
Length of box in m	0.47
Width of box in m	0.24
Height of box in m	0.26
ETIM class	EC000820
ETIM class name	Traffic signalling lamp
Weight	45 g
Product status	 Phase Out

Electric Parameters

Rated wattage	60.0 W
Lamp nominal wattage	60 W
Power factor	1.00
Nominal voltage	110 V
Lamp voltage	110-110 V
Mains voltage	110 V
Lamp's nominal current	0.545 A

Ship navigation lamp, B shape

SN-T 60W/1150C/110/P28S

Radium

Electric Parameters

Nominal current (mA)	545 mA
----------------------	--------

Light Application Parameters

Luminous intensity	50 cd
Color rendering index Ra	100

Specification

Diameter	39 mm
Length max.	108 mm
Burning position	s30
Mercury content	0.0 mg
Model	Clear
Base	P28s

Notes on Operation

Burning position	s30
------------------	-----

Miscellaneous

EU Directive	special lamp
--------------	--------------

Notes


Officially registered with the Federal Office for Navigation in Hamburg, Germany. Nominal life 1000h. Special lamp not suitable for general lighting.

Please, refer to www.radium.de/recycling for notes on disposal of burned-out lamps as well as lamp breakage.

The "lifespan L70" described for LED lamps indicates the number of hours when the luminous flux has decreased to 70% of its initial value.

The optimal field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

Base



P28s
IEC/EN 60061-1
sheet 7004-42-7

Spectrum

As daylight is a mixture of direct sunlight and light from the sky, the spectral distribution changes all the time due to the time of the day and the weather. The standard illuminant D65 corresponds to daylight with colour temperature of about 6500K.


Incandescent lamps have got a continuous red-dominated spectrum as the light is generated by heating up a tungsten filament.

Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/klm)per 10nm.


Ship navigation lamp, B shape

SN-T 60W/1150C/110/P28S

Radium

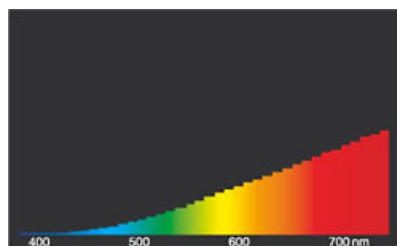

light of incandescent lamps

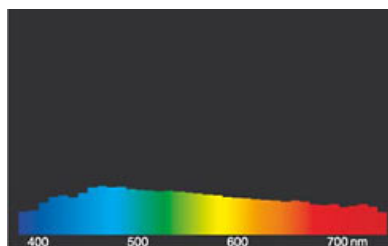

daylight(D 65)

General notes

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefts) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

All technical data without guarantee.