PRODUCT DATASHEET
SF CIRC 400 V 24W 840 IP44

SURFACE CIRCULAR 400 | Wall and ceiling luminaire with IP44



Areas of application

- Corridors
- Stairways
- Bathrooms
- Foyers

Product benefits

- Indoor luminaire with high luminous efficacy
- Energy savings of up to 55 % compared to luminaires that use CFL
- Easy and quick installation
- Very homogenous light
- 3 years guarantee

Product features

- Type of protection: IP44 (ceiling mounting), IP20 (wall mounting)
- Impact resistance: IK03
- Metal housing, PMMA cover
- Ambient temperature in operation: -20...+40 °C
- Indoor use only, not suitable for outdoor use

© 2023, LEDVANCE GmbH. All rights reserved.

TECHNICAL DATA


Electrical data

Nominal wattage	24.00 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Nominal current	115 mA
Inrush current	7.3 A
Inrush current time T_{h50}	360 µs
Max. no. of lum. on circuit break. B16 A	64
Max. no. of lum. on circuit break. C10 A	40
Max. no. of lum. on circuit break. C16 A	64
Power factor λ	> 0.55
Total harmonic distortion	< 120 %
Protection class	I
Operating mode	Integrated LED driver


Photometrical data

Luminous flux	1920 lm
Luminous efficacy	80 lm/W
Color temperature	4000 K
Light color (designation)	Cool White
Color rendering index Ra	> 80
Standard deviation of color matching	< 6 sdcm
Luminous intensity	-
Low flicker	Yes
Flickering metric (Pst LM)	-
Stroboscope effect metric (SVM)	-
Photobiological safety group acc. to EN62778	RG0
Photobiological safety group acc. to EN62471	RG0
Beam angle	120 °

© 2023, LEDVANCE GmbH. All rights reserved.

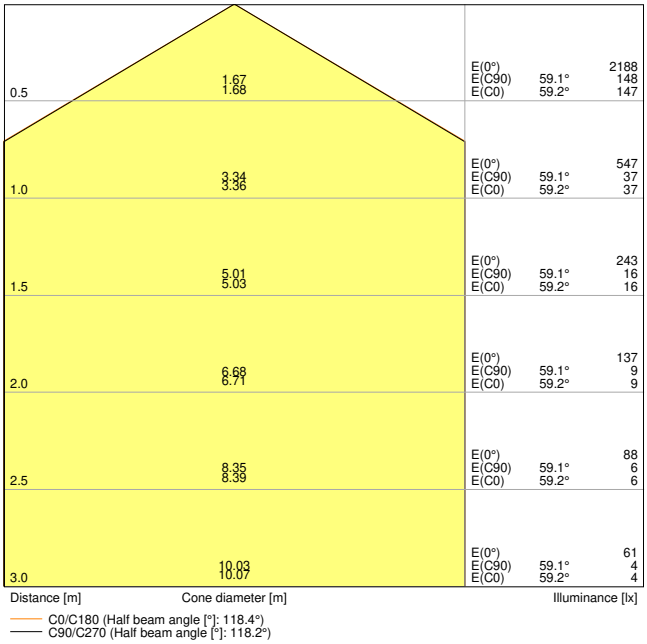


LDC typ cone

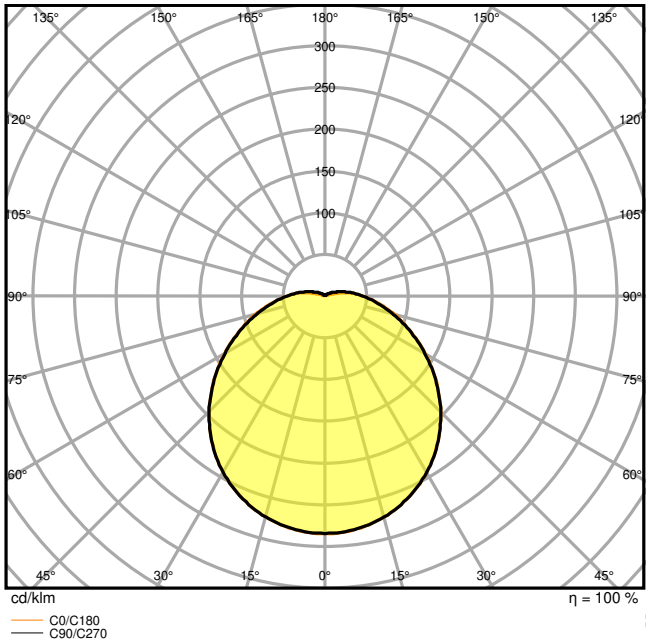

LDC typ polar

Dimensions & Weight

Diameter	400.00 mm
Height	120.00 mm
Product weight	750.00 g



Materials & Colors

Product color	White
Housing color	White
Body material	Steel
Cover material	Polymethylmethacrylate (PMMA)

© 2023, LEDVANCE GmbH. All rights reserved.

Light emitting surface material	PMMA
Glow Wire Test according to IEC 60695-2-12	650 °C
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-20…+40 °C
Temperature range at storage	-20…+80 °C
Type of connection	Terminal, 3-pin
Type of protection	IP44 [1)]
Protection class IK (shock resistance)	IK03
Dimmable	No
Mounting type	Surface
Mounting location	Ceiling / Wall
Application environment	Indoor
LED module replaceable	Not replaceable
With light source	Yes

1) Type of protection: IP44 (ceiling mounting), IP20 (wall mounting)

Lifespan

Lifespan L70/B50 at 25 °C	30000 h
Lifespan L80/B10 at 25 °C	22000 h
Lifespan L90/B10 at 25 °C	15000 h
Number of switching cycles	50000

Control gear

Output current	250 mA

Certificates & Standards

Standards	CE / CB / TÜV SÜD / EAC
Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No

EQUIPMENT / ACCESSORIES

- Replacement cover optional available

DOWNLOAD DATA

© 2023, LEDVANCE GmbH. All rights reserved.

	Documents and certificates
PDF	User instruction
PDF	Addon Technical Information
PDF	Packaging insert
PDF	Declarations Of Conformity CE
PDF	Declarations Of Conformity UKCA

	Photometric and lighting design files
	IES file (IES)
	LDT file (Eulumdat)
	ULD file (DIALux)
	ROLF file (RELUX)
	UGR file (UGR table)
	LDC typ cone
	LDC typ polar

	CAD/BIM files
ZIP	BIM_Revit_3D
	CAD_STEP_3D

	Tender texts
	Tender documents

LOGISTICAL DATA


Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075618046	Folding box 1	130 mm x 440 mm x 440 mm	912.00 g	25.17 dm^3
4058075618053	Shipping box 5	665 mm x 455 mm x 460 mm	5866.00 g	139.18 dm^3

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products.

© 2023, LEDVANCE GmbH. All rights reserved.

When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION



References / Links

- For Guarantee see www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

© 2023, LEDVANCE GmbH. All rights reserved.